



SERIES FX P

Permanent magnetic lifters

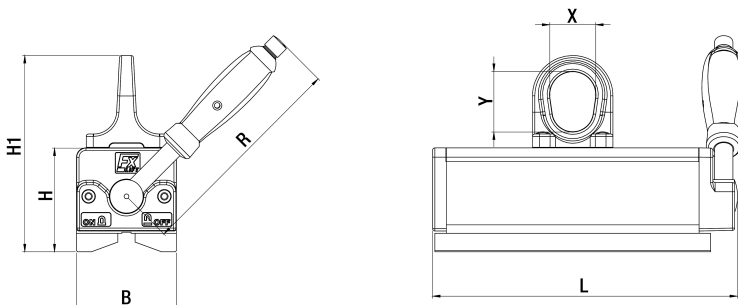

- ✓ Monoblock stator and rotor.
- ✓ 100% nickel plated.
- ✓ Special design for thin materials
- ✓ Suitable for handling pipes and profiles

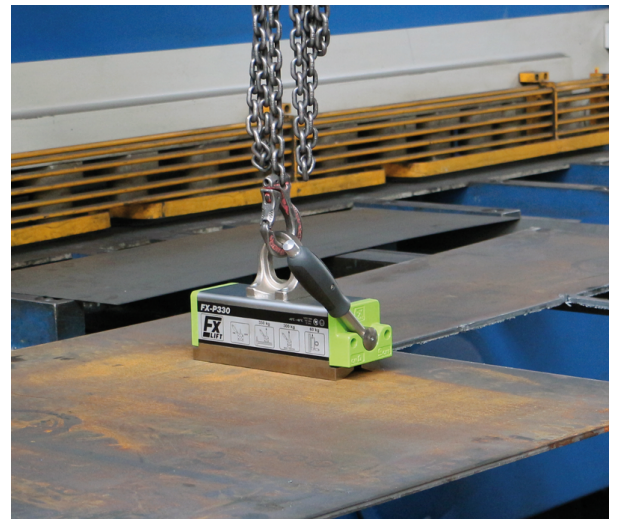

MODEL	MAX LOAD CAPACITY FOR SHEETS AND 4-EDGE PIPES (kg)						L x B Max. (mm)	PIPES Diam (mm)	CAPACITY(kg) /THICK. (mm)
	3 mm	4 mm	6 mm	8 mm	10 mm	15 mm			
FX P170	50	80	120	170	170	170	2000 x 1250	diam.30-105	150/8mm
FX P330	70	100	160	300	330	330	2500 x 1250	diam.40-160	300/10mm
FX P650	100	160	200	450	530	650	3000 x 1500	diam.60-210	550/20mm

MODEL	MAX LOAD CAPACITY (kg)		MAX LOAD CAPACITY FROM (mm)	DIMENSIONS (mm)						WEIGHT kg
	FLAT	ROUND		L	B	H	H1	R	X/Y	
FX P170	170	diam 30-105 mm 150 kg	8	195	64	70	134	136	30/42	5.1
FX P330	330	diam 40-160 mm 300 kg	10	265	87	90	170	190	42/53	12.4
FX P650	650	diam 60-210 mm 550 kg	20	352	112	106	203	228	51/62	26

Safety Factor 3.5 Test Method EN 13155 max. Operation temperature 80°C