



SERIES FX R

Permanent magnetic lifters

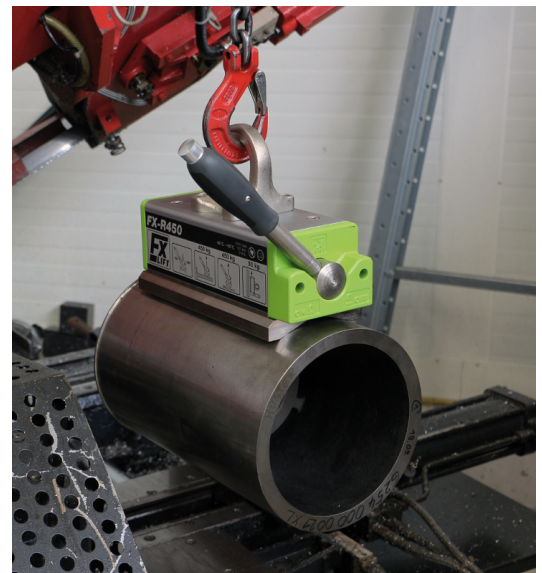

- ✓ Monoblock stator and rotor.
- ✓ 100% nickel plated.
- ✓ Wide angle prism for secure load positioning
- ✓ Range of application for circular materials from diam. 25 to diam. 560 mm

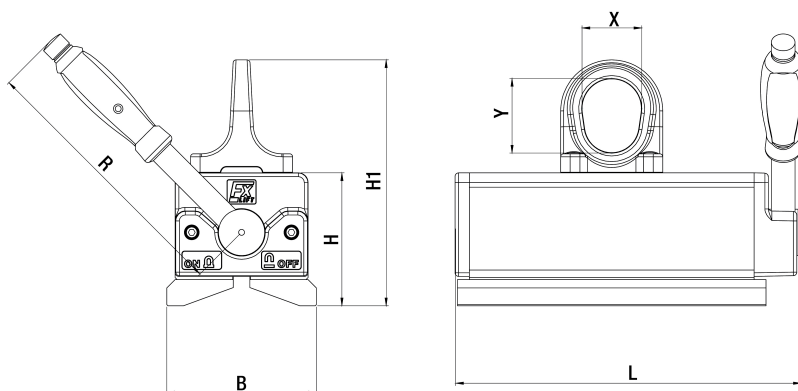

MODEL	MAX LOAD CAPACITY (kg)		MAX LOAD CAPACITY FROM (mm)	DIMENSIONS (mm)						WEIGHT kg
	FLAT	ROUND		L	B	H	H1	R	X/Y	
FX R100	100	diam 25-150 mm 100 kg	8	161	70	68	132	136	30/42	4
FX R225	225	diam 50-205 mm 225 kg	10	205	98	90	170	190	42/53	9.5
FX R450	450	diam 50-270 mm 450 kg	20	288	126	112	207	228	51/62	22
FX R750	750	diam 70-370 mm 750 kg	20	361	170	142	262	261	60/76	49
FX R1200	1200	diam 120-560 mm 1200 kg	40	472	248	190	334	409	68/89	127
FX R1800	1800	diam 120-560 mm 1800 kg	40	648	248	190	334	534	68/89	182
Safety Factor 3.5 Test Method EN 13155 max. Operation temperature 80°C										